


COMMERCIAL (DG) LITE



AA SERIES - 125mm FRAME

The Commercial (DG - double glazed only) Lite has one simple purpose - to fulfil the requirements of a very large, single-panel double glazed window

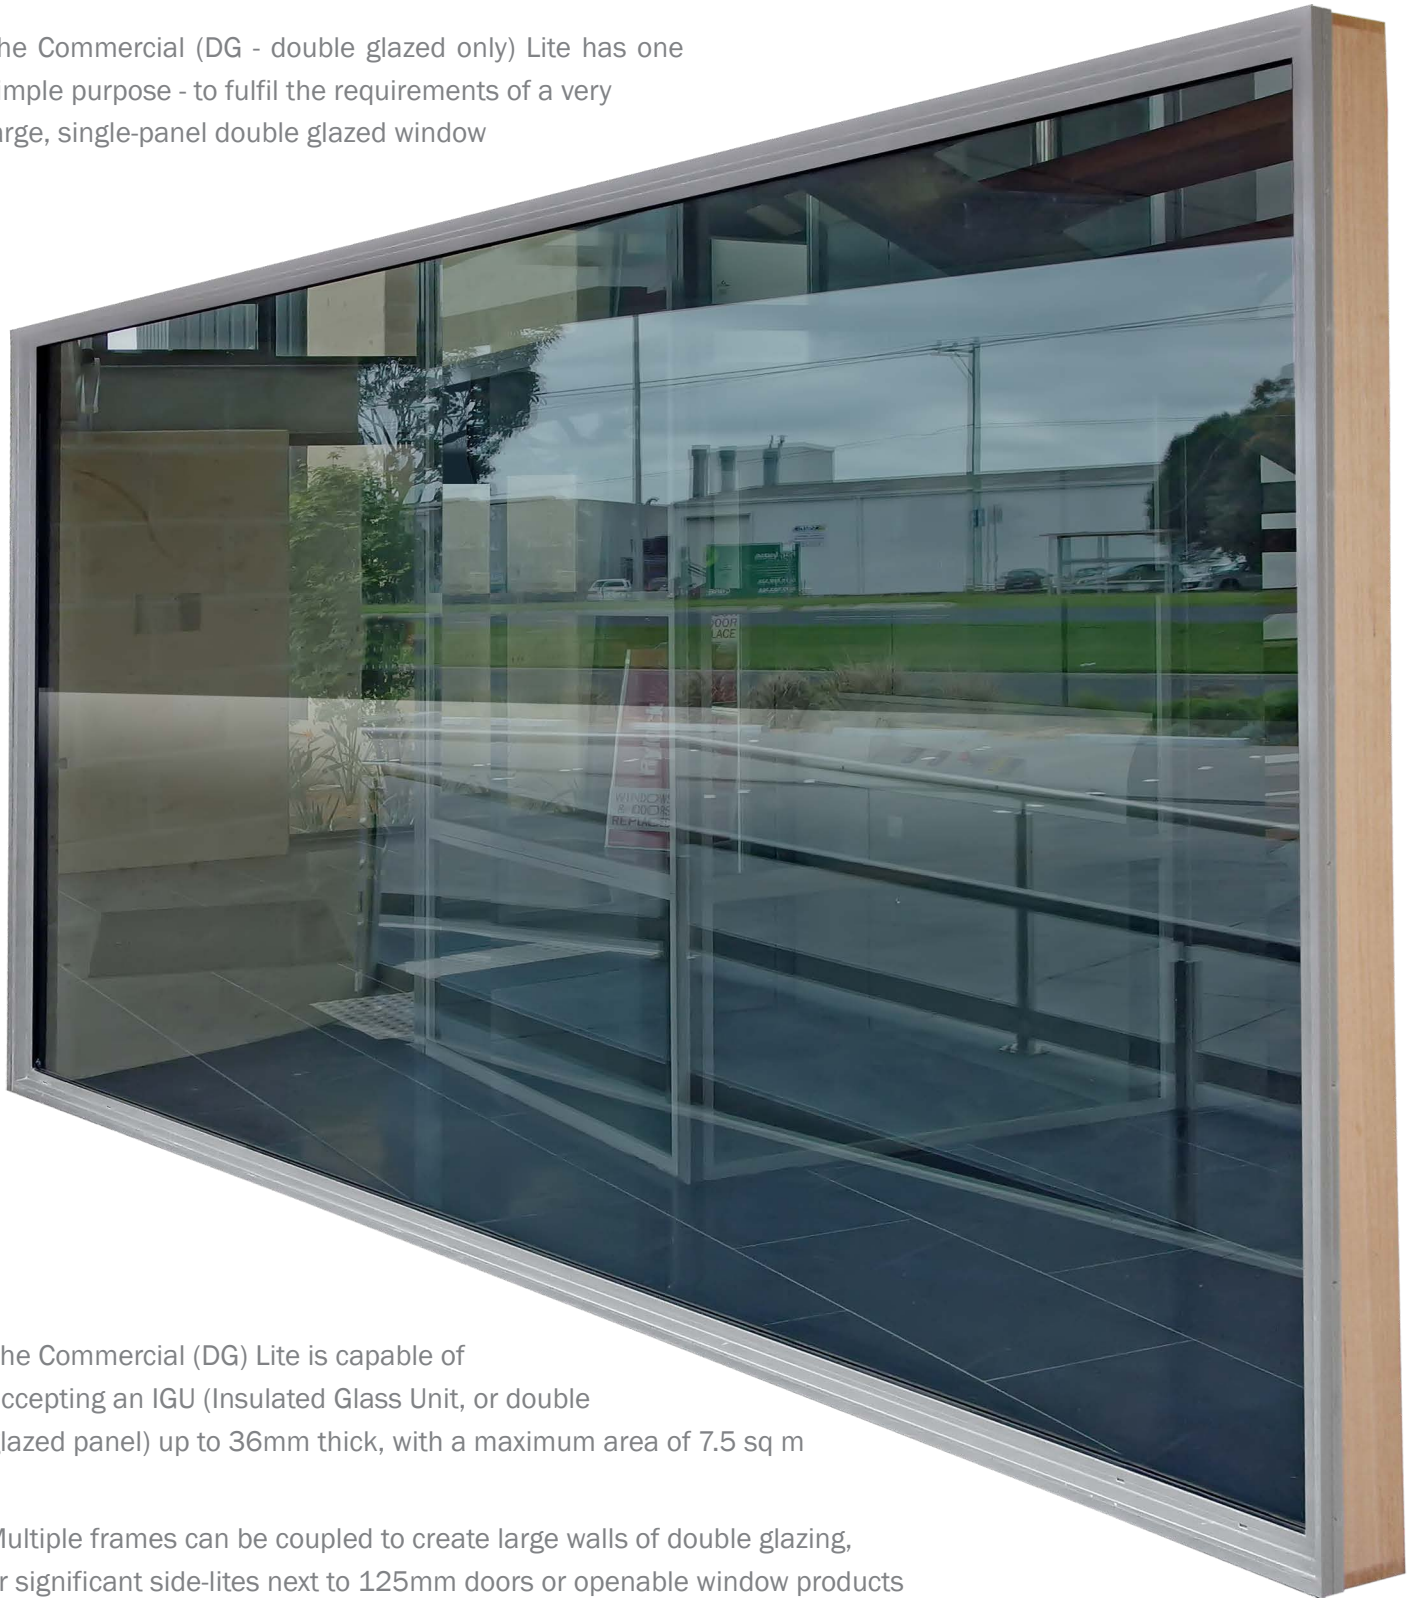

The Commercial (DG) Lite is capable of accepting an IGU (Insulated Glass Unit, or double glazed panel) up to 36mm thick, with a maximum area of 7.5 sq m

Multiple frames can be coupled to create large walls of double glazing, or significant side-lites next to 125mm doors or openable window products


A fixing pocket to the inside accepts a neat cover strip post-installation. Like most AA Series products, reveals are available in primed or raw hardwood, or for a 'commercial' look with a Reveal Equaliser (in coated aluminium)

All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. A co-extruded santoprene inner seal resists shrinkage & also assists with weatherproofing

COMMERCIAL (DG) LITE



AA SERIES - 125mm FRAME

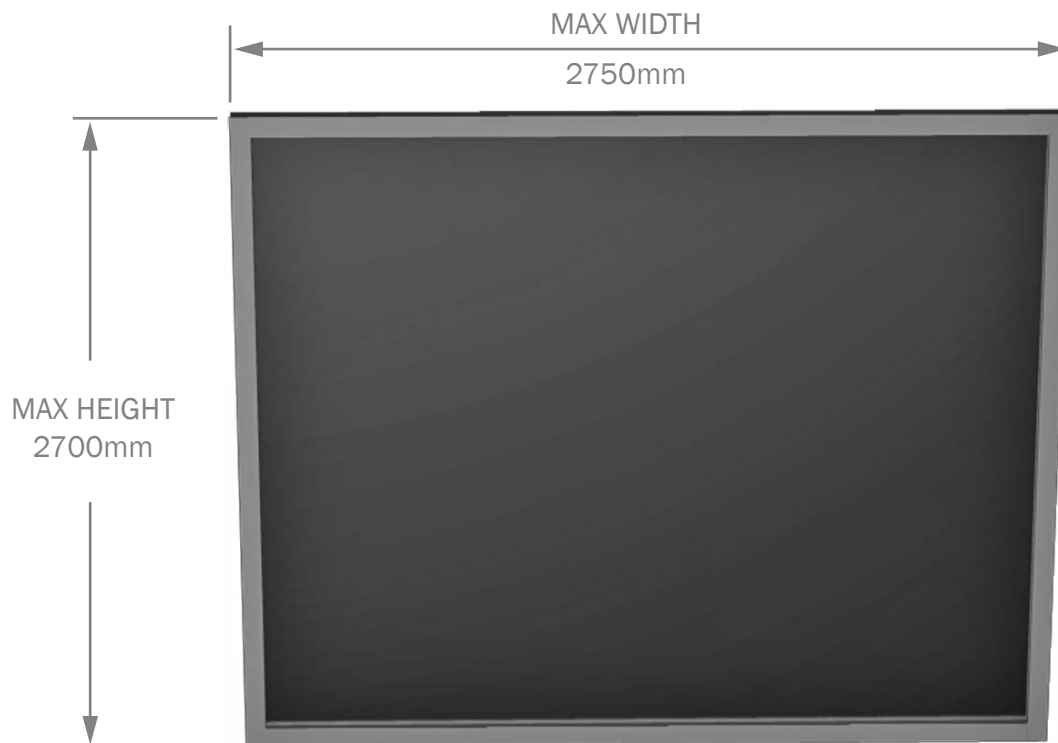

DOUBLE GLAZED SIZES

NOTE THAT HEIGHT & WIDTH MAY BE VARIED AS LONG AS TOTAL AREA REMAINS THE SAME (MAXIMUM OF 7.5 SQUARE METRES), SUBJECT TO RESTRICTIONS ON HEIGHT vs. WIDTH RATIO

NOTE: ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE THESE - INCLUDING MULTIPLE, COUPLED UNITS - PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally. Sizes indicated are the overall window size. Reveal is in line with outer frame dimension. For Stud openings add 20mm to both height & width.

Glazing

Glazing strength to minimum N3 rating, maximum double glazed panel thickness is 36mm. Double glazed panels typically contain 8mm toughened glass, 16mm spacer, 8mm toughened glass.

Certification

Certified performance data including WERS ratings are available for this product on request.

Specify

Frame colour, height, width & overall depth, reveal type (including for plaster reveals).
Optional: external frame infill, reveal equaliser, sub sill, sill flap, glass type.

The above product sizes comply with structural requirements (AS2047-2014, *Windows and external glazed doors in buildings*) for an 'N1' wind rating (AS4055-2012, *Wind loads for housing*).

This is typical of sites in suburban areas. In addition, the location has a Terrain Category of 3, is Topographic Class 1 or 2 and assumes the building will be surrounded by others of similar size.

Please specify if your site has different characteristics to any of those listed. Your building professional (architect, designer, surveyor, engineer, builder, etc.) can often assist with such determinations.