


# FIXED LITE WINDOW

AA SERIES - 65mm FRAME




Transoms (horizontal) or mullions (vertical) may be fitted within a single outer frame

Mitred corners enhance the window's clean appearance. All fixings are made from durable stainless steel

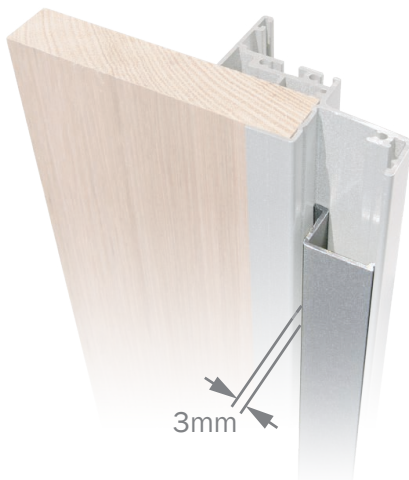

The optional external frame infill has a 15 x 3mm slot for flashing insertion

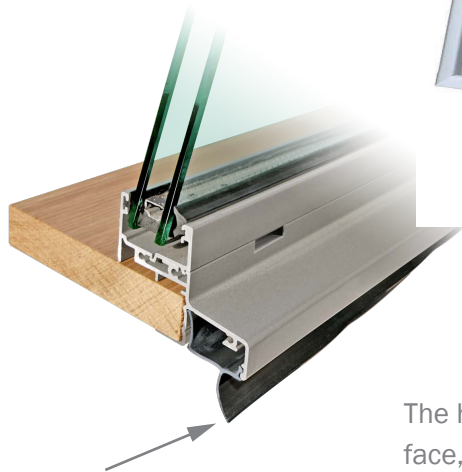

All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. A co-extruded santoprene inner seal resists shrinkage & also assists with weatherproofing


The hardwood reveal sits inline with the frame's outer face, simplifying installation into a variety of wall types

An optional sill flap may be specified when required. Hardwood reveals can be supplied as primed or raw, or with a 1.6mm spacer to assist in the creation of a 'square set' look

# FIXED LITE WINDOW



## AA SERIES - 65mm FRAME

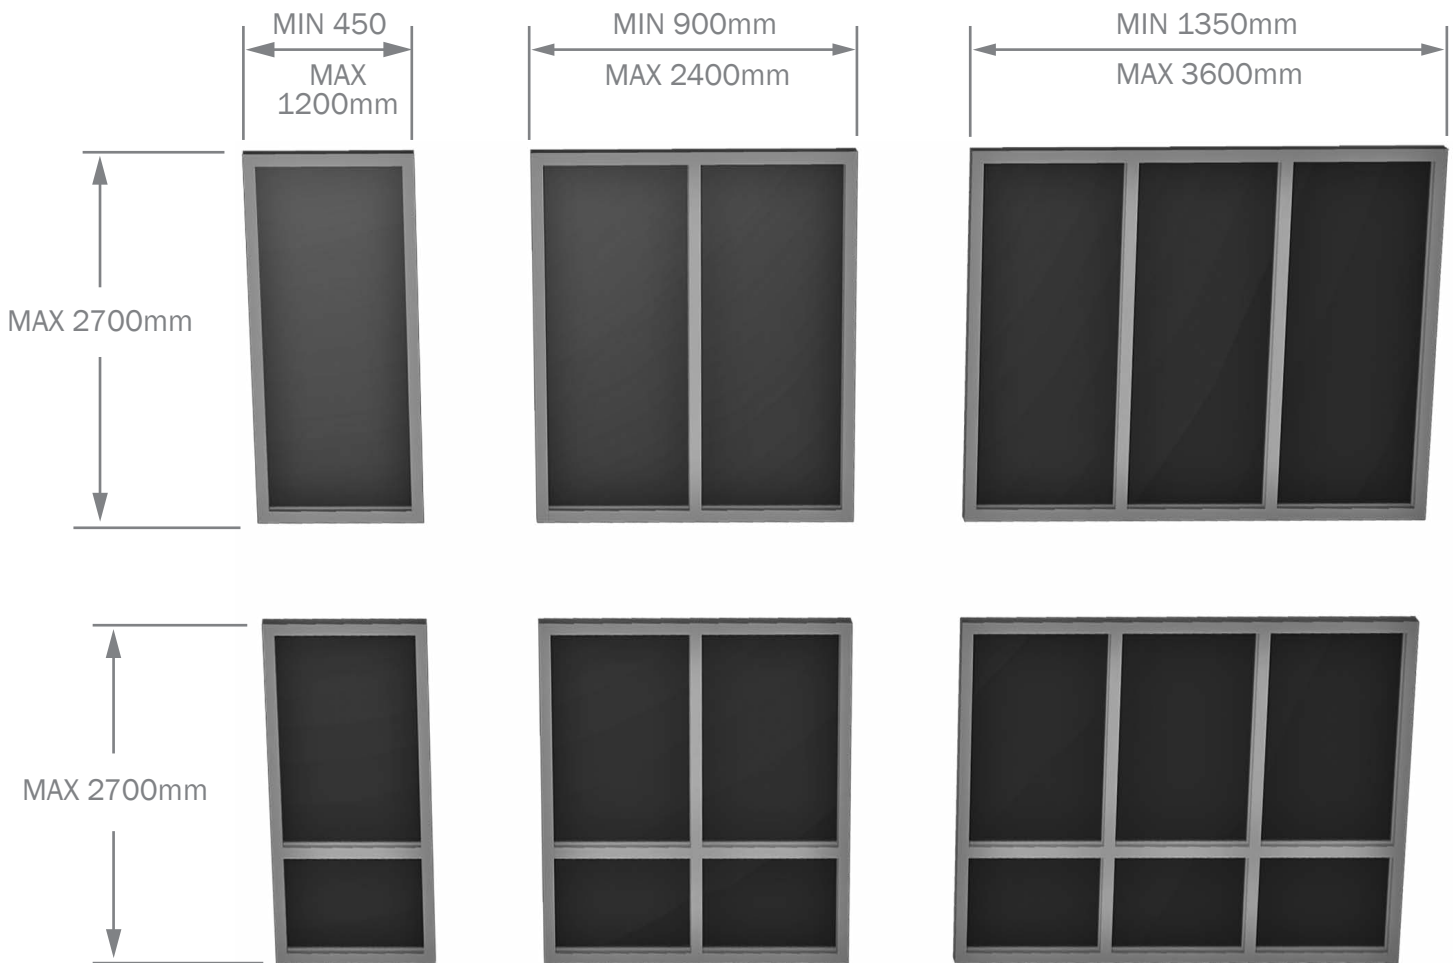

**NOTE:** ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE (incl. raked windows) PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

### Sizing

Window style & opening detail should be considered as viewed externally  
Sizes indicated are the overall window size. Reveal is inline with outer frame dimension  
For Stud openings add 20mm to both height & width

### Glazing

Glazing strength to minimum N3 rating, maximum double glazed panel thickness is 22.38mm

### Certification

Certified performance data including WERS ratings are available for this product on request

### Specify

Frame colour, configuration, height, width & overall depth, reveal type (including for plaster reveals)  
Optional: external frame infill, reveal equaliser, sill flap, glass type

The above product sizes comply with structural requirements (AS2047-2014, *Windows and external glazed doors in buildings*) for an 'N1' wind rating (AS4055-2012, *Wind loads for housing*).

This is typical of sites in suburban areas. In addition, the location has a Terrain Category of 3, is Topographic Class 1 or 2 and assumes the building will be surrounded by others of similar size.

Please specify if your site has different characteristics to any of those listed. Your building professional (architect, designer, surveyor, engineer, builder, etc.) can often assist with such determinations.