

# HINGED DOOR

## AA SERIES - 125mm FRAME



Hinged doors are available as Open-In or Open-Out, as single panel or French doors. These doors can also be coupled with 90mm & 125mm windows to create integrated products for stunning entries, functional laundries or classic balconies

Lever compression locks are the most popular option. They secure at multiple points, offering peace of mind & superior weather protection



Corners are mitred to enhance the clean aesthetic, whilst all fixings are made from durable stainless steel

All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. The hinged panels can have transoms (horizontal aluminium bars) fitted to them to complement the architectural style of your project



Handle choices are 'Summit' (above) or 'Aria', & are available in either black, white or satin chrome (French doors are black or satin chrome only)




Quality compression seals ensure efficient weatherproofing, & resist shrinkage over time

The optional external frame infill has a 15 x 3mm slot to accept flashing. Reveals can be supplied as primed or raw hardwood. When reveals are not wanted, the optional 'reveal equaliser' trims off the internal face for a more 'commercial' aesthetic



# HINGED DOOR

## AA SERIES - 125mm FRAME

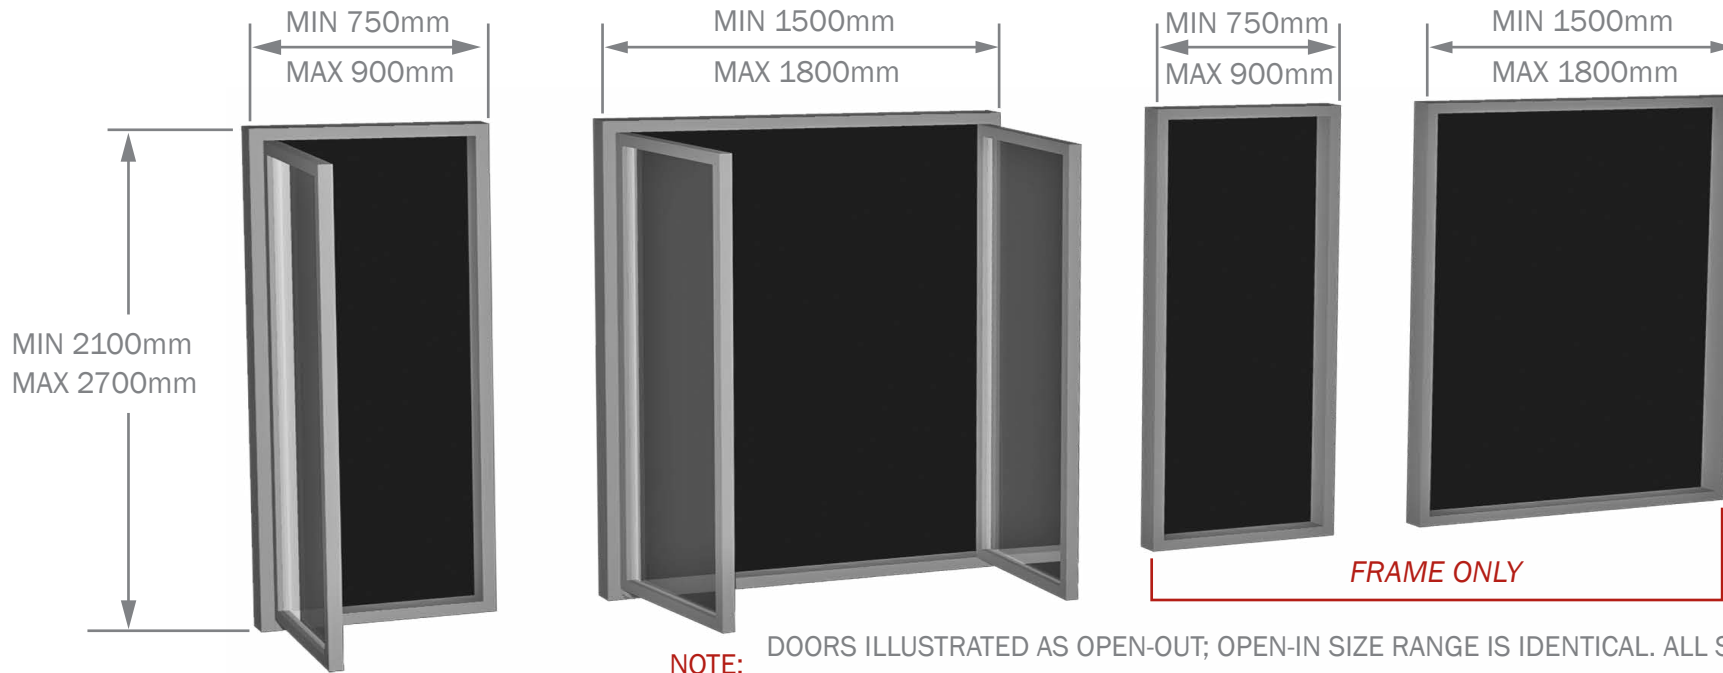

**NOTE:** DOORS ILLUSTRATED AS OPEN-OUT; OPEN-IN SIZE RANGE IS IDENTICAL. ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE PLEASE TALK WITH YOUR RYLOCK SALES CONSULTANT

### Sizing

Door style & opening detail should be considered as viewed externally

Sizes indicated are the overall door size

For Stud openings add 20mm to both height & width

### Glazing

Glazing strength to minimum N3 rating, grade A safety glass

Maximum double glazed panel thickness is 22.38mm

### Certification

A glazing certificate can be supplied for this product on request

### Specify

Frame colour, configuration, height, width & depth, reveal type (including for plaster reveals)

Optional: lock type, handle type & colour, hinge type & colour, external frame infill, reveal equaliser, sill align infill (for side lites), sill flap, glass type

The above product sizes comply with structural requirements (AS2047-2014, *Windows and external glazed doors in buildings*) for an 'N1' wind rating (AS4055-2012, *Wind loads for housing*).

This is typical of sites in suburban areas. In addition, the location has a Terrain Category of 3, is Topographic Class 1 or 2 and assumes the building will be surrounded by others of similar size.

Please specify if your site has different characteristics to any of those listed. Your building professional (architect, designer, surveyor, engineer, builder, etc.) can often assist with such determinations.

All Rylock hinged & bifold doors use quality compression seals. Rylock acknowledge that these doors do not seal as well as sliding or stacking doors when it comes to adverse weather. For this reason, Rylock strongly encourage that hinged & bifold doors only be installed into protected locations (ie: where an eave, porch, verandah, external awning, etc. afford reasonable shielding from wind driven rain).