


STACKER DOORS (3 & 6 PANEL)

AA SERIES - 150mm FRAME (205mm total depth with optional fly screen)



Stacker doors are a natural evolution of the sliding door. They incorporate another row of sliding panels into a deeper product, able to span larger distances & offer a wider thoroughfare when fully open. A similarly-stacking fly screen is a popular option

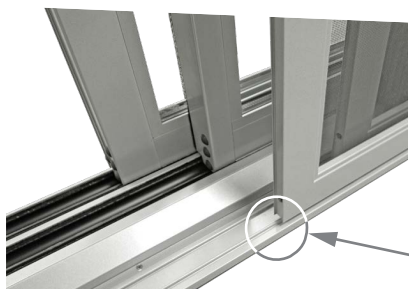

All panels roll on two 80kg rated, ball-bearing carriages which run on anodised track inserts

All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. Sliding panels are weatherproofed through dual wool-pile seals at the head, jamb, sill & interlocker

When specified, fly screens run on their own tracks which fix neatly to the exterior of the door frame




The standard lock features anti-lift pins & is key lockable from both sides (above). It is available in black, white & silver. An instile lock & architectural handle (shown below) is an optional upgrade (satin-chrome finish only)



STACKER DOORS (3 & 6 PANEL)



AA SERIES - 150mm FRAME (205mm total depth with optional fly screen)

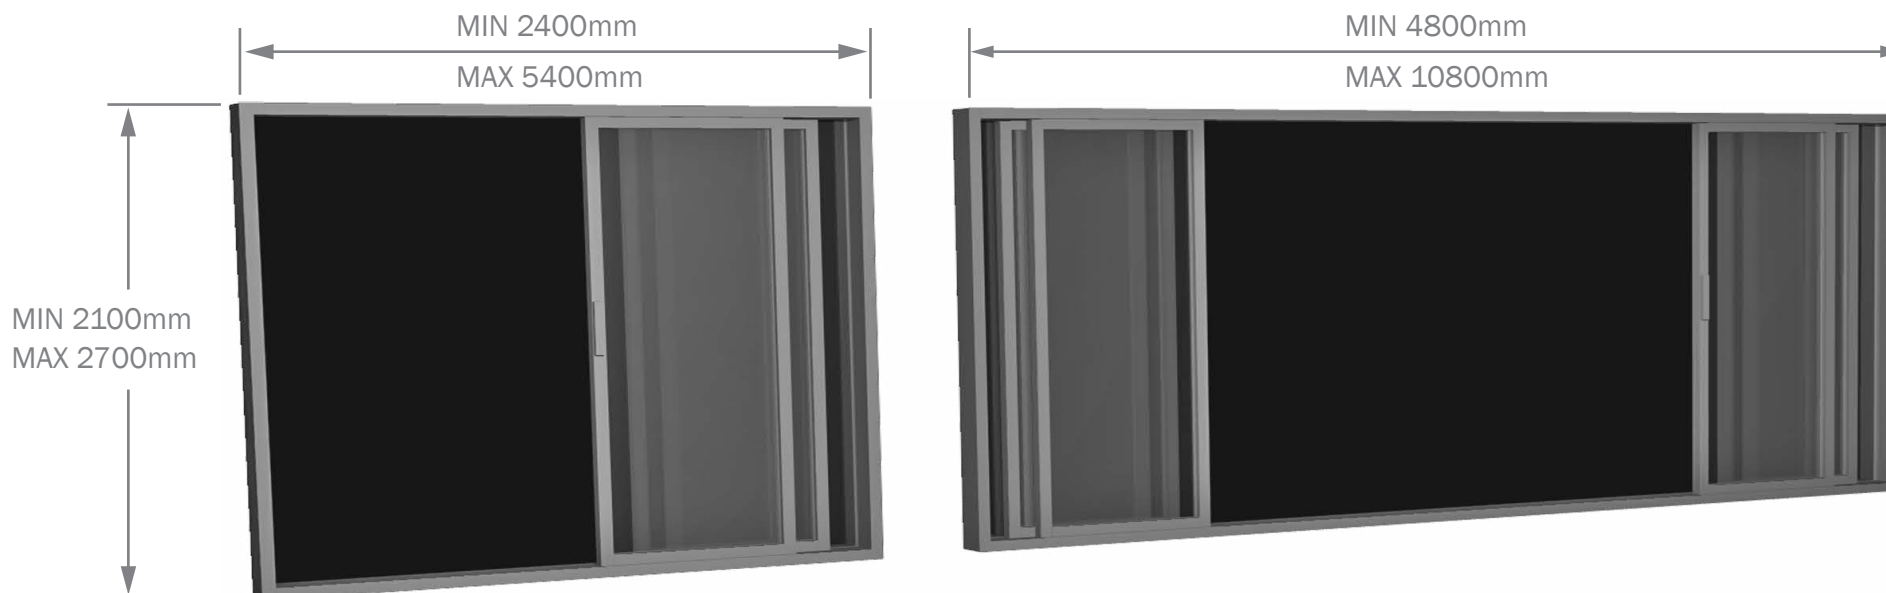

NOTE: ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. ANY WIDTH OVER 6000mm WILL REQUIRE THE FRAME TO BE JOINED ONSITE, WHICH WILL INCUR EXTRA COST. NOTE THAT FLY SCREEN DOORS OVER 1200mm WIDE WILL REQUIRE A SPREADER BAR TO RETAIN TENSION, & SCREENS WITH STAINLESS STEEL MESH CAN ONLY BE SUPPLIED TO A MAXIMUM WIDTH OF 1500mm.

Sizing

Door style & opening detail should be considered as viewed externally

Sizes indicated are the overall door size. For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating

Glazing to be grade A safety glass. Maximum double glazed panel thickness is 22.38mm

Certification

Certified performance data including WERS ratings are available for this product on request

Specify

Frame colour, configuration, height, width & depth, reveal type (including for plaster reveals)

Optional: lock type, handle type & colour, dummy handle (architectural handle only), patio bolt & colour, fly screen, mesh type, external frame infill, reveal equaliser, sill flap, glass type

The above product sizes comply with structural requirements (AS2047-2014, *Windows and external glazed doors in buildings*) for an 'N1' wind rating (AS4055-2012, *Wind loads for housing*).

This is typical of sites in suburban areas. In addition, the location has a Terrain Category of 3, is Topographic Class 1 or 2 and assumes the building will be surrounded by others of similar size.

Please specify if your site has different characteristics to any of those listed. Your building professional (architect, designer, surveyor, engineer, builder, etc.) can often assist with such determinations.